


DIMENSIONS IN INCHES

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	X	AX
225-2	8.82	6.07	5.79	4.09	2.44	11.0	8.94	5.67	1.81	5.55	4.13	3.54	6	2.95	0.10	1.28	0.09	M6 x 10	0.38	10.1
250-2	9.80	6.81	6.50	4.53	2.76	12.3	10.0	6.28	2.05	6.2	5.43	4.53	6	3.93	0.26	1.40	0.13	M6 x 10	0.38	11.1
280-2	11.0	7.58	7.28	5.12	3.17	13.7	11.2	7.13	2.28	6.97	5.43	4.53	6	3.93	0.26	1.40	0.13	M6 x 16	0.50	12.6
280-4	11.0	7.58	7.28	5.12	3.17	13.7	11.2	7.13	2.28	6.97	4.13	3.54	6	2.95	0.10	1.28	1.25	M6 x 10	0.50	12.6
315-2	12.4	8.53	8.19	5.63	3.46	15.0	12.6	8.03	2.56	7.72	7.40	6.38	6	5.49	0.24	1.85	0.13	M10 x 20	0.50	13.9
315-4	12.4	8.53	8.19	5.63	3.46	15.0	12.6	8.03	2.56	7.72	4.13	3.54	6	2.95	0.10	1.28	0.13	M6 x 10	0.50	13.9
355-4	14.0	9.61	9.23	6.22	4.02	16.6	14.2	9.05	2.91	8.58	5.43	4.53	8	3.93	0.26	1.40	0.13	M6 x 16	0.50	15.6
400-4	15.8	10.6	10.2	6.97	4.41	18.3	16.0	9.80	3.27	9.61	5.43	4.53	8	3.93	0.26	1.40	0.17	M6 x 16	0.50	17.3
450-4	17.7	12.1	11.6	7.87	4.97	20.2	17.3	11.2	3.66	10.8	7.40	6.38	8	5.49	0.24	1.85	0.17	M10 x 20	0.50	19.3

NOTE: SINGLE PHASE UNITS REQUIRE OPTIONAL REMOTE CAPACITOR

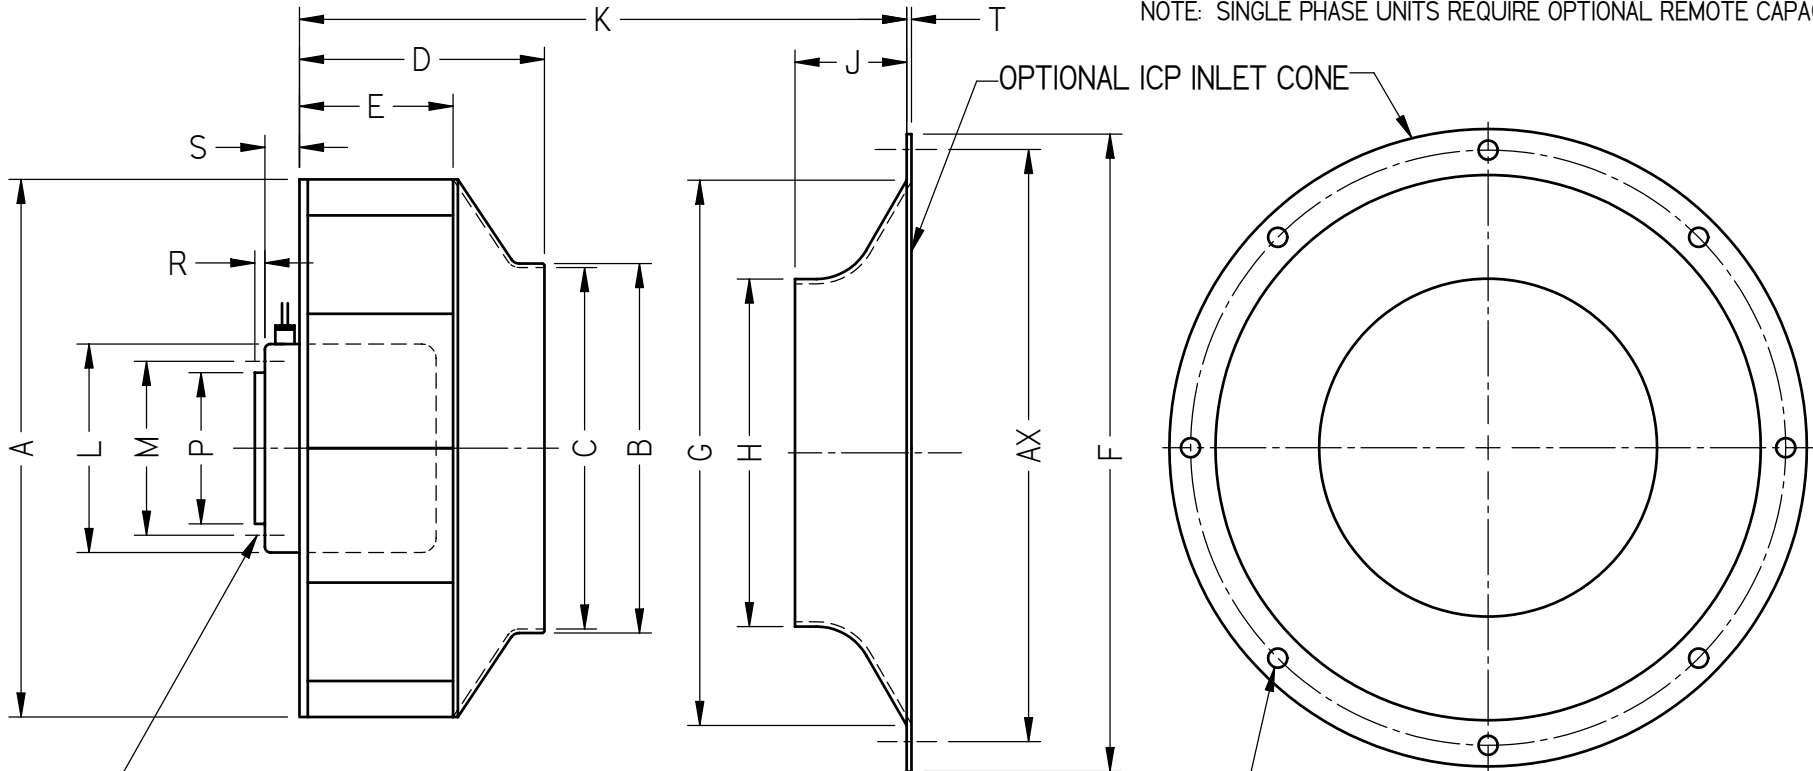

4 THREADED HOLES FOR 'U' MOUNTING BOLTS EQUALLY SPACED ON 'M' BOLT CIRCLE DIA.

'X' DIAMETER 'N' HOLES EQUALLY SPACED ABOUT 'AX' BOLT CIRCLE DIA.

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. DRAWING NOT TO BE USED FOR CONSTRUCTION.

07	REVISED 09 JAN '09	JEE	CONTINENTAL FAN MFG. INC. <i>Better Airflow By Design</i> CFM
06	REVISED 24 APR '08	JEE	
05	REVISED 24 MAY '07	JEE	
04	REVISED 01 JAN '06	JEE	
03	REVISED 10 DEC '02	JEE	
02	REVISED 07 NOV '02	JEE	
01	REVISED 12 SEPT '01	JEE	
00	ISSUED 30 MAY '01	JEE	
TMK OUTLINE DIMENSIONS			
TMK MOTORIZED IMPELLERS			C
REV	DATE	BY	J. E. EVANS 30 MAY 2001 TMK DIMENSIONS.dft