



MODEL: TF TRANQUIL BATHROOM FANS

TF Tranquil bathroom fans offer whisper-quiet exhaust (under 1 sone). The built-in damper prevents a backdraft, keeping tempered air in a home when the fan is not operating.



Model	TF80	TF110	TF150
Air Volume (cfm @ 0.1" SP)	80	110	150
Air Volume (cfm @ 0.25" SP)	58	100	130
Sones (Rated at 0.1" SP)	0.4	0.9	0.9
Power Consumption (W)	22.8	28.0	35.0
Power Rating (V/Hz)	120V / 60 Hz		
Duct Diameter (In.)	4 & 6	4 & 6	6

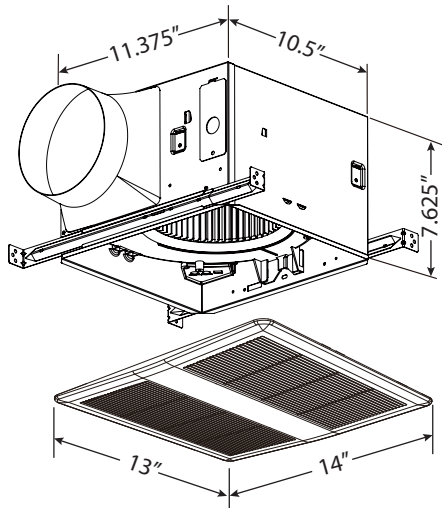

HVI & Energy Star for Model TF80 only

CONSTRUCTION

- 26 GA galvanized steel housing
- Durable polymeric resin grille for long life
- Double hanger mounting brackets adjust to 24" span
- Built-in backdraft damper
- Available to fit duct sizes 4" & 6"
- TF80 is HVI certified and Energy Star qualified for 6" duct only


MOTOR

- Efficient AC motor
- Single phase
- 120V, 60 Hz
- Automatic reset thermal overload protection


PROJECT				ARCHITECT			
DATE				ENGINEER			
SUBMITTED BY				CONTRACTOR			
SPECIFICATION							
FAN NO.	MODEL NO.	CFM	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT

MODEL: COMMERCIAL TF TRANQUIL BATHROOM FAN

Commercial TF Tranquil bathroom fans offer whisper-quiet exhaust. The built-in damper prevents a backdraft, keeping tempered air in a home when the fan is not operating.

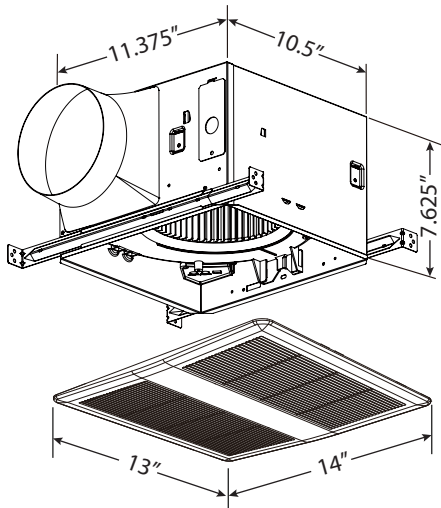

Model	TF150	TF200	TF300
Air Volume (cfm @ 0.1" SP)	150	200	290
Air Volume (cfm @ 0.25" SP)	130	188	268
Sones (Rated at 0.1" SP)	0.9	2.0	4.0
Power Consumption (W)	35.0	24.0	52.0
Power Rating (V/Hz)	120V / 60 Hz		
Duct Diameter (In.)	6		



CONSTRUCTION

- 26 GA galvanized steel housing
- Durable polymeric resin grille for long life
- Double hanger mounting brackets adjust to 24" span
- Built-in backdraft damper
- Fits 6" duct

MOTOR

- Efficient AC motor
- Single phase
- 120V, 60 Hz
- Automatic reset thermal overload protection

PROJECT				ARCHITECT			
DATE				ENGINEER			
SUBMITTED BY				CONTRACTOR			
SPECIFICATION							
FAN NO.	MODEL NO.	CFM	VOLTS	WATTS	QTY	OPTIONAL EQUIPMENT	