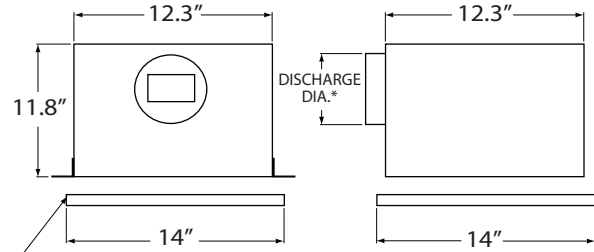


better AIRFLOW by DESIGN™

MODEL: CEF100, CEF150, CEF200, CEF250 & CEF300

CEF Commercial Ceiling Exhaust Fans are designed for public restrooms, hotels, conference rooms, or any space requiring continuous ventilation applications.

 <p>POLIMERIC GRILLE *Discharge diameter - 6" for CEF100 & CEF150 8" for CEF200, CEF250 & CEF300</p>		DIMENSIONS IN INCHES					
		MODEL	WATTS	RPM*	CFM 0.125" SP	DUCT DIA.	WT (lbs)
		CEF100	88	640 / 650	109	6"	23
		CEF150	96	710 / 750	157	6"	23
		CEF200	124	740 / 760	210	8"	23
		CEF250	160	830 / 860	259	8"	23
		CEF300	204	935 / 950	308	8"	24
*RPM shown is horizontal / vertical discharge at 0.125"							

FEATURES & BENEFITS

- 1/2" acoustic housing insulation
- 20 GA. galvanized steel housing
- Low profile grille
- Integral backdraft damper
- Easily removable blower assembly
- Horizontal (standard) or vertical discharge
- 8 position mounting brackets
- Anti-vibration mounts isolate motor for smooth operation
- Thermally protected fan motor

OPTIONS

- Variable speed control
- Time delay switch
- In-line kit
- Radiation damper
- Roof and wall caps

PROJECT					ARCHITECT			
DATE					ENGINEER			
SUBMITTED BY					CONTRACTOR			
SPECIFICATION								
FAN NO.	MODEL NO.	CFM	IN. WG	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT

better AIRFLOW by DESIGN™

MODEL: CEF400 & CEF700

CEF Commercial Ceiling Exhaust Fans are designed for public restrooms, hotels, conference rooms, or any space requiring continuous ventilation applications.

DIMENSIONS IN INCHES					
MODEL	WATTS	RPM*	CFM 0.125" SP	DUCT DIA.	WT (lbs)
CEF400	137	735 / 755	434	18.5" x 4.5"	34
CEF700	298	960 / 985	701	18.5" x 4.5"	34

FEATURES & BENEFITS

- 1/2" acoustic housing insulation
- 20 GA. galvanized steel housing
- Low profile grille
- Integral backdraft damper
- Easily removable blower assembly
- Horizontal (standard) or vertical discharge
- 8 position mounting brackets
- Anti-vibration mounts isolate motor for smooth operation
- Thermally protected fan motor

OPTIONS


- Variable speed control
- Time delay switch
- In-line kit
- Radiation damper
- Roof and wall caps
- Square to round discharge transition

PROJECT					ARCHITECT			
DATE					ENGINEER			
SUBMITTED BY					CONTRACTOR			
SPECIFICATION								
FAN NO.	MODEL NO.	CFM	IN. WG	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT

better AIRFLOW by DESIGN™

MODEL: CEF900

CEF Commercial Ceiling Exhaust Fans are designed for public restrooms, hotels, conference rooms, or any space requiring continuous ventilation applications.

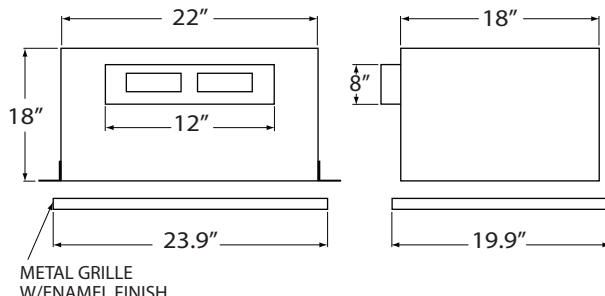 <p>METAL GRILLE W/ENAMEL FINISH</p>		DIMENSIONS IN INCHES					
		MODEL	WATTS	RPM*	CFM 0.125" SP	DUCT DIA.	WT (lbs)
		CEF900	261	650 / 675	901	12" x 8"	65
*RPM shown is horizontal / vertical discharge at 0.125".							

FEATURES & BENEFITS

- 1/2" acoustic housing insulation
- 20 GA. galvanized steel housing
- Low profile grille
- Integral backdraft damper
- Easily removable blower assembly
- Horizontal (standard) or vertical discharge
- 8 position mounting brackets
- Anti-vibration mounts isolate motor for smooth operation
- Thermally protected fan motor

OPTIONS

- Variable speed control
- Time delay switch
- In-line kit
- Radiation damper
- Roof and wall caps

PROJECT					ARCHITECT			
DATE					ENGINEER			
SUBMITTED BY					CONTRACTOR			
SPECIFICATION								
FAN NO.	MODEL NO.	CFM	IN. WG	VOLTS	WATTS	AMPS	QTY	OPTIONAL EQUIPMENT