

CENTRIFUGAL FANS & BLOWERS

CPB CAST ALUMINUM PRESSURE BLOWERS

FEATURES & BENEFITS

- Cast aluminum radial blade impeller
- Designed for highly efficient performance
- AMCA Type B spark resistant construction
- Rugged cast aluminum housing
- Circular inlet & outlet collars
- Single or three phase TEFC motors
- CW or CCW rotation available; please specify
- Discharge rotatable to 4 positions
- Suitable for 0 to 150 F
- Static pressures to 11" w.g.
- Capacities to 3,410 cfm



APPLICATIONS

- Vehicle exhaust
- Air knives
- Combustion air
- Exhausting smoke, fumes & dust from high pressure applications
- Dust collection & material conveying
- High pressure cooling & drying


ACCESSORIES / OPTIONS

- Flanged inlet & outlet
- Inlet & outlet guards
- Protective coating
- Nozzle
- Special duty motors
- Slide gate damper
- Teflon shaft seal for corrosive environments
- Explosion proof motors

MODEL	HP	WHEEL DIA.	INLET	OUTLET	ROTATION	AIRFLOW PERFORMANCE (CFM) AT 3450 RPM											
						1.0" SP		3.0" SP		5.0" SP		7.0" SP		9.0" SP		11.0" SP	
						CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP
CPB-08-12	½	8.0 x 2.8	4	4	CW	345	0.37	242	0.31	-	-	-	-	-	-	-	-
CPB-09-12	½	8.0 x 2.8	5	4	CCW	380	0.39	275	0.30	-	-	-	-	-	-	-	-
CPB-09-34	¾	9.0 x 2.9	5	4	CCW	480	0.62	380	0.57	210	0.42	-	-	-	-	-	-
CPB-09-01	1	10.5 x 2.9	5	4	CCW	575	0.80	495	0.72	400	0.54	270	0.41	-	-	-	-
CPB-10-34	¾	9.0 x 2.9	6	5	CW, CCW	571	0.73	400	0.60	91	0.37	-	-	-	-	-	-
CPB-10-32	1½	11.0 x 2.8	6	5	CW, CCW	840	1.50	700	1.35	590	1.26	460	1.05	-	-	-	-
CPB-12-01	1	11.0 x 3.0BC	7	6	CW	865	1.07	710	0.99	535	0.87	160	0.55	-	-	-	-
CPB-12-32	1½	10.5 x 2.9	7	6	CW, CCW	1055	1.62	890	1.42	670	1.20	360	0.77	-	-	-	-
CPB-12-02	2	11.0 x 2.8	7	6	CW, CCW	1150	1.91	975	1.72	750	1.40	475	1.05	-	-	-	-
CPB-12-3A	3	11.5 x 2.8	7	6	CW, CCW	1245	2.48	1086	2.20	890	2.00	630	1.53	-	-	-	-
CPB-12-3B	3	12.8 x 2.9	7	6	CW, CCW	Contact Factory		1237	3.10	1046	2.81	882	2.50	700	1.91	-	-
CPB-12-05	5	14.0 x 3.0	7	6	CW, CCW	1600	4.21	1550	4.00	1400	3.78	1285	3.63	1125	3.40	945	2.81
CPB-14-03	3	12.3 x 3.0	8	6	CW, CCW	1575	3.40	1405	3.11	1250	2.71	1000	2.21	685	1.90	-	-
CPB-14-05	5	14.0 x 3.0	8	6	CW, CCW	1875	4.98	1710	4.60	1550	4.15	1400	3.80	1203	3.50	1045	2.98
CPB-15-05	5	14.0 x 3.0	8	8	CW, CCW	2300	5.30	2100	4.95	1900	4.50	1678	4.10	1410	3.60	1170	3.21
CPB-15-07	7½	15.5 x 5.0BC	8	8	CW	2360	6.50	2210	6.00	1950	5.32	1800	4.65	1595	4.10	1300	3.70
CPB-15-10A	10	15.5 x 5.0	8	8	CW, CCW	2700	9.40	2510	8.90	2365	7.95	2211	7.00	1950	6.20	1711	5.90
CPB-15-10B	10	16.5 x 5.0	8	8	CW, CCW	3000	11.00	2875	10.70	2700	10.40	2550	10.20	2400	9.90	2215	9.40
CPB-15-15A	15	14.0 x 3.0	10	8	CCW	2565	6.20	2347	5.80	2175	5.30	1841	4.60	1586	4.00	1181	3.20
CPB-15-15B	15	15.5 x 5.0BC	10	8	CW	2610	7.10	2420	6.50	2210	6.00	1975	5.50	1712	4.95	1425	4.10
CPB-15-15C	15	15.5 x 5.0	10	8	CCW	3211	11.20	3108	10.90	2875	10.40	2743	9.70	2501	8.60	2184	7.00
CPB-15-15D	15	16.5 x 5.0	10	8	CCW	3410	14.00	3230	13.00	3029	12.20	2850	11.60	2669	10.80	2561	10.20

CENTRIFUGAL FANS & BLOWERS

CPB CAST ALUMINUM PRESSURE BLOWERS

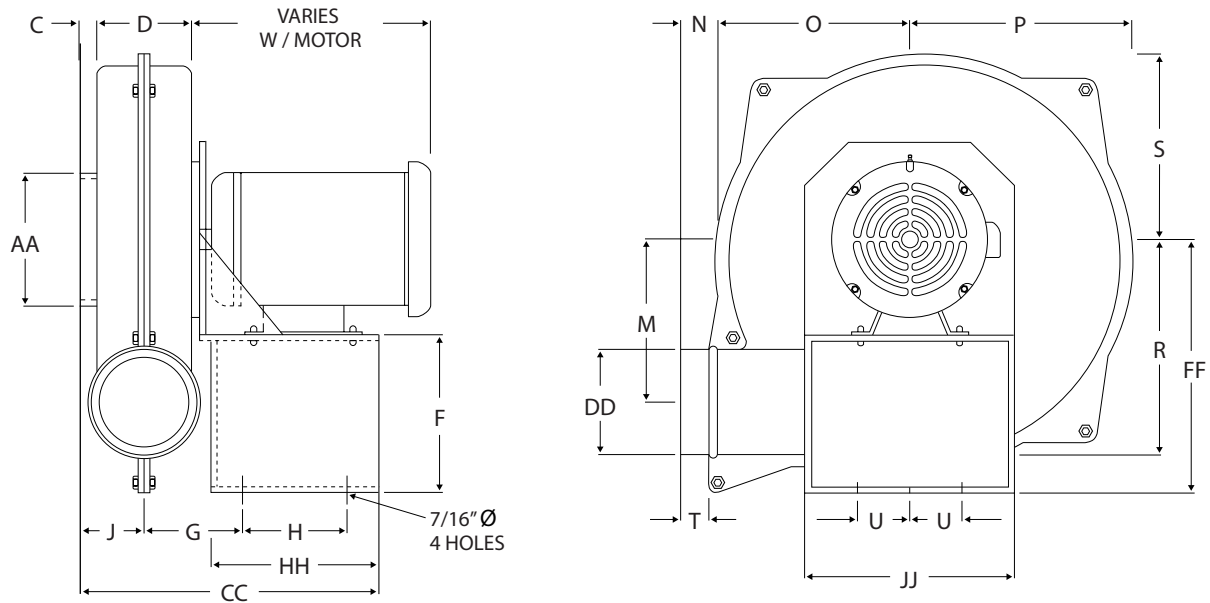

CLOCKWISE ROTATION - BOTTOM HORIZONTAL DISCHARGE SHOWN

MODEL	DIMENSIONS IN INCHES*																				MTR FRAME
	C	D	F	G	H	J	M	N	O	P	R	S	T	U	AA	CC	DD	FF	HH	JJ	
CPB-08	1.3	3.8	6.0	4.3	5.5	3.1	4.1	1.4	4.5	5.3	6.3	4.8	1.0	3.5	4.0	14.0	4.0	9.5	7.9	9.5	56
CPB-09	1.3	3.8	6.0	4.3	5.5	3.1	5.6	1.4	5.9	7.0	7.8	6.4	1.0	3.5	5.0	14.0	4.0	9.5	7.9	9.5	56 143T-145T
CPB-10	1.3	4.3	7.0	4.5	5.5	3.4	6.5	1.0	6.9	9.4	9.0	7.8	1.0	3.5	6.0	14.5	5.0	10.5	7.9	7.0	56
	1.3	4.3	7.0	4.5	5.5	3.4	6.5	1.0	6.9	9.4	9.0	7.8	1.0	3.5	6.0	14.5	5.0	10.5	7.9	9.0	143T-145T
CPB-12	1.3	4.3	8.0	4.5	5.5	3.4	7.4	1.1	7.6	9.1	10.2	7.6	1.0	3.5	7.0	14.5	6.0	11.5	7.9	9.5	56 143T-145T
CPB-12	1.3	4.3	7.0	4.9	8.8	3.4	7.4	1.1	7.6	9.1	10.2	7.6	1.0	4.9	7.0	18.3	6.0	11.5	11.4	12.5	182T-184T
CPB-14	1.6	5.3	9.5	5.3	5.5	4.1	8.0	1.0	8.6	9.9	11.3	9.5	1.0	3.5	8.0	15.0	6.0	13.0	7.9	9.5	143T-145T
	1.6	5.3	8.5	5.9	8.8	4.1	8.0	1.0	8.6	9.9	11.3	9.5	1.0	4.9	8.0	18.5	6.0	13.0	11.4	12.5	182T-184T
CPB-15	1.4	6.0	9.0	6.0	8.8	4.4	8.0	1.8	9.4	10.9	11.9	9.9	1.0	4.9	8.0	20.4	8.0	13.5	11.4	12.5	143T-145T 182T-184T
CPB-15	1.4	6.0	9.0	6.0	8.8	4.4	8.0	1.8	9.4	10.9	11.9	9.9	1.0	4.9	8.0	20.4	8.0	14.5	11.4	12.5	213T-215T 254T-256T
CPB-15	1.4	6.0	9.0	6.0	8.8	4.4	8.0	1.8	9.4	10.9	11.9	9.9	1.0	4.9	10.0	20.1	8.0	13.5	11.4	12.5	182T-184T
	1.4	6.0	9.0	6.0	8.8	4.4	8.0	1.8	9.4	10.9	11.9	9.9	1.0	4.9	10.0	20.1	8.0	14.5	11.4	13.5	213T-215T

*DO NOT USE FOR CONSTRUCTION

CONSULT FACTORY FOR CERTIFIED PRINTS

CENTRIFUGAL FANS & BLOWERS

CAB CAST ALUMINUM BLOWERS

FEATURES & BENEFITS

- Forward curved, steel impeller
- Designed for highly efficient performance
- Rugged cast aluminum housing, heavy duty steel base
- AMCA Type C spark resistant construction
- CW rotation only; rotatable to 4 positions
- Suitable for 0 to 150 F
- Circular inlet and outlet collars
- Single or three phase TEFC motors
- Capacities to 1,550 cfm

APPLICATIONS


- Smoke & fume removal
- Spot cooling
- Electronic equipment & DC motor cooling

ACCESSORIES / OPTIONS

- Nozzle
- Inlet & outlet guards
- Flanged inlet & outlet
- Protective coating
- Slide gate damper
- Carrying handle
- Explosion proof motors
- Special duty motors
- Wall mounting bracket
- Support base with rubber feet
- Teflon shaft seal for corrosive environments




			AIRFLOW PERFORMANCE (CFM)																			
MODEL	MAX HP	RPM	0.25" SP		0.5" SP		0.75" SP		1" SP		1.5" SP		2.0" SP		2.5" SP		3.0" SP		3.5" SP		4.0" SP	
			CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP
CAB-04	⅓	1725	210	0.04	135	0.02	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	⅓	3450	500	0.38	470	0.34	440	0.32	420	0.30	360	0.26	260	0.16	-	-	-	-	-	-	-	-
CAB-06	¼	1150	248	0.06	96	0.02	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	⅓	1725	440	0.18	370	0.14	300	0.11	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1 ½	3450	900	1.45	870	1.40	850	1.35	820	1.30	780	1.20	730	1.15	660	1.00	580	0.90	470	0.80	390	0.70
CAB-08	¼	1150	860	0.26	720	0.18	600	0.15	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1 ½	1725	1550	1.15	1500	1.05	1490	1.00	1400	0.90	1200	0.85	950	0.70	-	-	-	-	-	-	-	-

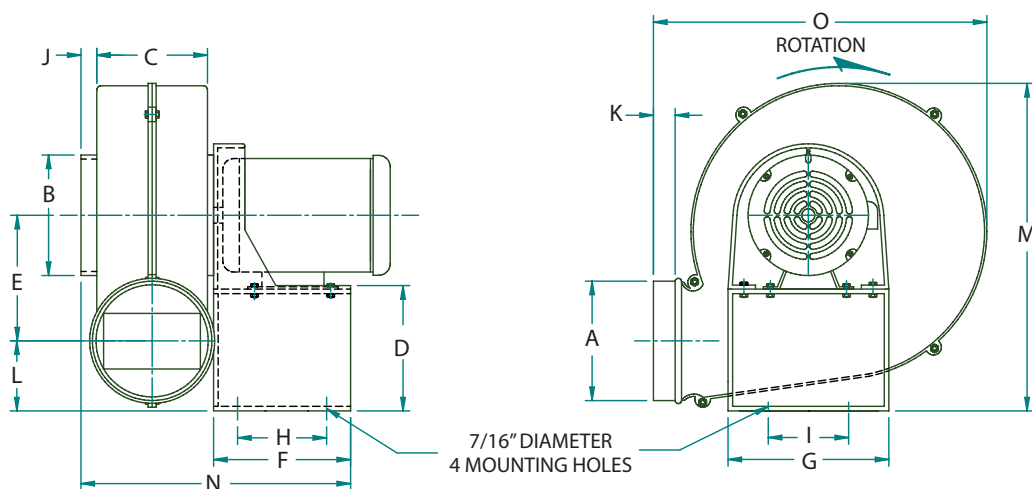


DIMENSIONS IN INCHES*																
MODEL	WHEEL DIA.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
CAB-04	4.75	4.0	4.9	4.0	5.0	2.8	7.0	6.9	4.3	4.3	0.9	0.9	5.8	12.5	13.1	9.1
CAB-06	6.25	6.0	5.9	4.6	5.0	4.3	7.0	6.9	4.3	4.3	1.1	0.9	4.3	13.5	14.3	11.8
CAB-08	8.50	8.0	7.9	5.8	8.0	5.4	8.5	8.4	6.5	6.5	1.1	0.9	5.6	17.9	16.6	14.0

*DO NOT USE FOR CONSTRUCTION. ALL DIMENSIONS SHOWN +/- 0.125".

CONSULT FACTORY FOR CERTIFIED PRINTS

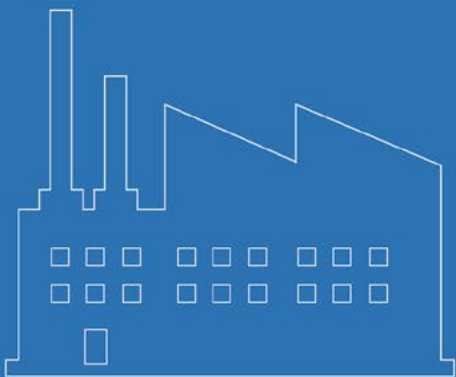

***Industrial Fans
& Blowers***

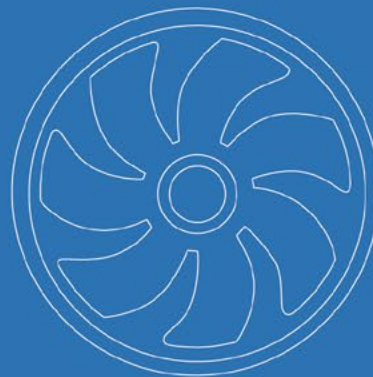

***OEM Solutions
& Custom Fans***



***Commercial Fans
& Dampers***



***Residential Fans &
Air Purifiers***



Industrial Fans & Blowers

Continental Fan Manufacturing Inc.
Buffalo, NY ~ Dayton, OH

Continental Fan Canada Inc.
Mississauga, ON

continentalfan.com
1-800-779-4021

Distributed by:

